
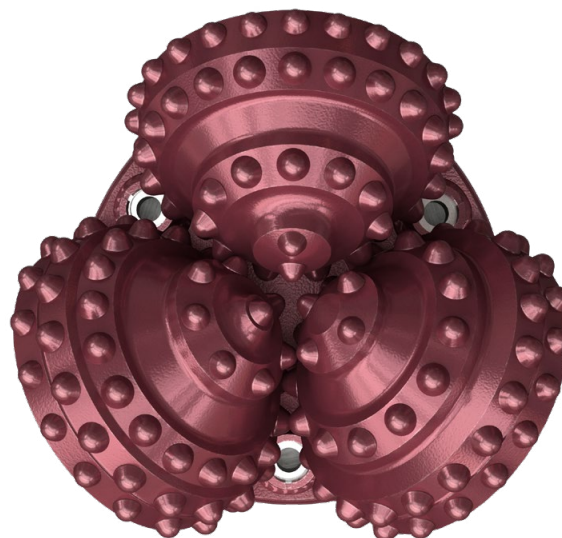


# Roller cone bit

## 10 5/8" 269,9.732

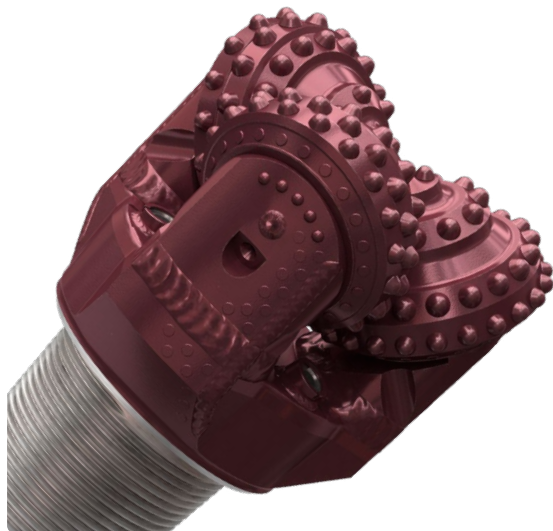

### Application.

The bit is designed for drilling of hard abrasive rock formations, e.g. granite-porphry, silicized limestone, magnetite and hematite-magnetite hard ore, ferrous, monolithic and thick quartzite, medium-grained diorite, thick garnet skarn, quartzeous gneiss, diabase and basalt, emery chlorite ore, weak pegmatite and quartzeous magnesite, most frequently found in gold, iron and granite mines.

Recommended drilling parameters for maximum efficiency of the bit: low and medium rotation speed (60-115 RPM) and axial load from 130 to 240 kN.

Rock strength range - from 38 000 to 60 000 PSI.

### Specification

<b>Bearing support type</b>	Open rolling bearing support with air blow-through
<b>Bearing/cooling type</b>	Roller - Ball - Roller / Air cooling
<b>Shirttail protection</b>	2/3 Shirttail protection with TCIs and wear-resistant hardmetal surfacing
<b>Blow-through type</b>	Side (center) air blow-through
<b>IADC code</b>	732Y
<b>Connection thread</b>	6 5/8 REG
<b>Nozzle diameter, mm</b>	22 (installed)+ spare nozzles 20,25
<b>Bit weight, kg</b>	Net - 65,0 / Gross - 69,0 kg
<b>Cutting structure</b>	Tungsten carbide inserts
<b>Inner and nose TCIs</b>	Conical (111 TCIs)
<b>Gauge row TCIs</b>	Spheroconical (59 TCIs)
<b>Gauge bevel TCIs</b>	Flat (66 TCIs)

