
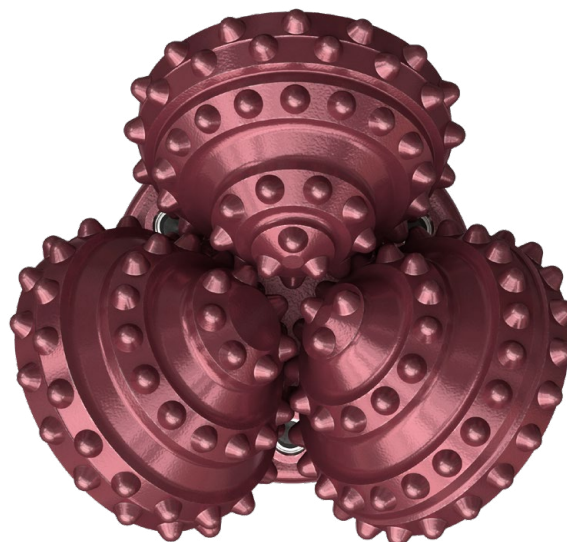


# Roller cone bit

## 9 5/8" 244,5.642

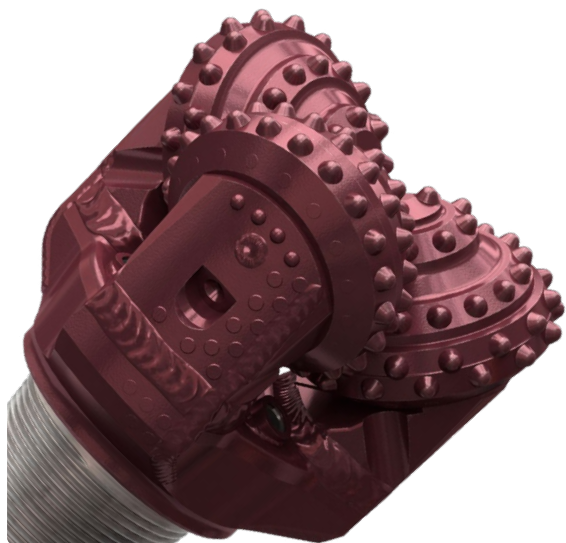

### Application.

The bit is designed for drilling of medium-hard and hard abrasive rock formations, e.g. quartzeous sandstone with lime cement, magnesite, ferrous quartzite, diorite, quartzeous porphyry, silicized shale, fine-grained skarn, weak pegmatite, martite ore and metamorphic granite rocks, fine-grained diorite and diabase, most frequently found in gold and copper mines.

Recommended drilling parameters for maximum efficiency of the bit: low and medium rotation speed (60-115 RPM) and axial load from 100 to 210 kN.

Rock strength range - from 24 000 to 44 000 PSI.



### Specification

<b>Bearing support type</b>	Open rolling bearing support with air blow-through
<b>Bearing/cooling type</b>	Roller - Ball - Roller / Air cooling
<b>Shirrtail protection</b>	2/3 Shirrtail protection with TCIs and wear-resistant hardmetal surfacing
<b>Blow-through type</b>	Side (center) air blow-through
<b>IADC code</b>	642Y
<b>Connection thread</b>	4 1/2 FH
<b>Nozzle diameter, mm</b>	16(installed)+ spare nozzles 18
<b>Bit weight, kg</b>	Net - 42,8 / Gross - 46,3 kg
<b>Cutting structure</b>	Tungsten carbide inserts
<b>Inner and nose TCIs</b>	Conical (120 TCIs)
<b>Gauge row TCIs</b>	Conical (53 TCIs)
<b>Gauge bevel TCIs</b>	Flat (51 TCIs)